



Project _____
AIA # _____ SIS# _____
Item # _____ Quantity _____ C.S.I. Section 114000



ABSPMS-40L - 40 Quart Heavy Duty Electronic Planetary Mixer



Model ABSPMS-40L

25 lbs flour / 40 lbs dough capacity

STANDARD FEATURES

- Strong Welded Steel Body with NSF epoxy paint
- Stainless Steel Bowl, Whip, Hook, Pour Spout and Aluminum Paddle
- Digital Control Panel- 10 Speeds- 'Shift on the Fly' - without stopping
- Digital Timed or Untimed Operation
- Heavy Duty 1.5 HP Motor – 220/60/3
- High Torque, Dual Stage non-Slip Quiet Belt Drive.
- Heavy Duty Hinged Bowl Cage with Safety Interlock
- Cushioned Feet for enhanced stability
- No Gears to Break, No Oil to Leak and no Seals to Fail

CONTROL AND PERFORMANCE FEATURES

- Digital Control- 10 Speeds - Timed or Untimed Operation
- High Torque, Dual Stage, Non-Slip, Silent Belt Drive
- Automatic Over-Current Protection with External Reset
- Emergency Stop mounted at EYE Level
- Standard Attachments - Stainless Steel Hook, Whip, Pour Spout and Aluminum Paddle
- 6 Foot Electrical Cord with NEMA Cord Cap

OPTIONS & ACCESSORIES

- 20-Quart Mixing Bowl and Attachments; No Adapter Necessary

STANDARD PRODUCT WARRANTY

- One-Year Parts and Labor (Contiguous US and Canada Mainland)

MARKETING SPECIFICATION

Specified mixer shall be an ABSPMS-40L, 40 Quart Capacity Planetary Mixer with Solid Welded Steel Body Finished in NSF epoxy Paint and fitted with four Non-Skid Foot Pads for stability. Mixer shall be equipped with Stainless Steel Bowl, Whip, Hook, Pour Spout and Aluminum Paddle. Mixing Tools shall be fitted closely to the bottom and sides of the mixing bowl to eliminate hand scraping. Mixer shall be equipped with a Ten-Speed Digital Control Panel-Featuring 'Shift on the Fly'- No Stopping between speed Changes, Slow Start Up on all Speeds, and Manual or Timed Mixing. Mixer shall be equipped with a Non-Slip, Low Noise, High Torque Drive System, Safety Interlocked Full Bowl Cover with ingredient opening for Pour Spout, and Emergency Stop mounted at eye level. Mixer shall be ETL Listed and Comply with UL 763 and NSF 8 Standards.



Meets UL 763 and NSF-8




Send Orders to: ABSorders@mpmfeg.com

MPM Food Equipment Group, LLC
236 Egidi Drive, Suite A, Wheeling, IL 60090
Phone: 800-976-6762 Fax: 847-297-6725
Email: info@mpmfeg.com
WEB: www.mpmfeg.com



40-Quart Heavy Duty Electronic Planetary Mixer

ABSPMS-40L

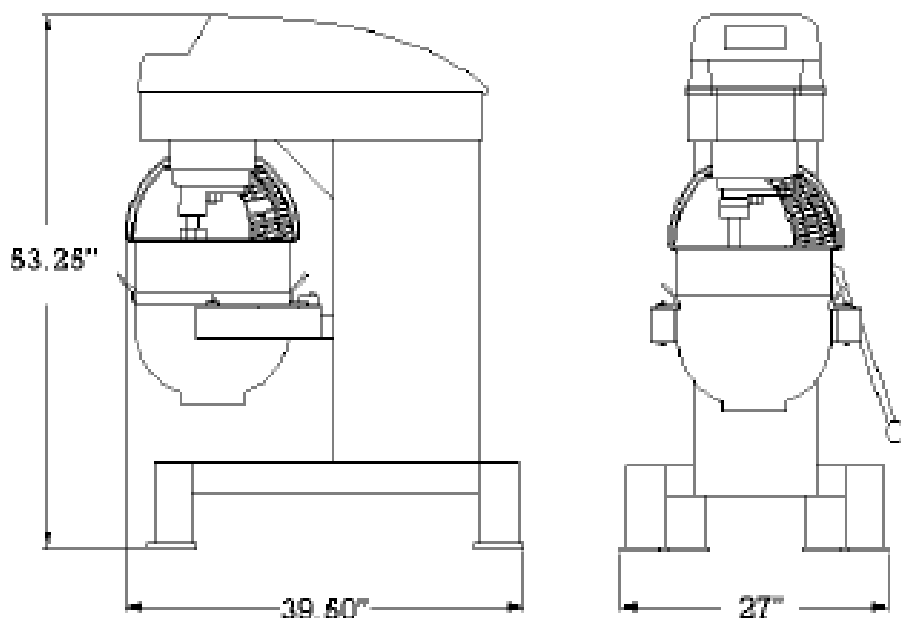

| MODEL ABSPMS-40L UTILITY SPECIFICATIONS | |
|---|-----------------------------|
| Electrical | 208-220/60/3 |
| Plug | NEMA 5-15P |
| Breaker | Breaker - Type B RCD or RCM |
| Motor HP | 3.0 HP |
| Agitator Speed (RPM) | Low: 125 High: 424 |
| Motor kW | 2.3 |

| ABSPMS-40L CAPACITIES | | |
|------------------------|---------|-----|
| Capacity (lbs) | Flour | 25 |
| | Dough | 40 |
| 10 Mixing Speeds (RPM) | Speed 1 | 125 |
| | Speed 2 | 424 |

| SHIPPING | | | | | | | |
|------------|--|--|--------|------------|---------------|----------------|-----------------------------------|
| Model | Crated Dimensions Height x Width x Depth | Unit Dimensions Height x Width x Depth | Weight | Net Weight | Freight Class | Door Clearance | Fork Lift Delivery Recommended |
| ABSPMS-40L | 62" x 43" x 34" | 53" x 27" x 40" | 790 | 620 | 85 | 36" or wider | Yes |



Send Orders to: ABSorders@mpmfeg.com