

# Always a spotless rotisserie

TDR 7/8 s auto-clean

**Save time, save costs and boost your sales with a spotless cooking theater that offers all the benefits of a traditional Fri-Jado rotisserie. Save at least one hour of labor every day as manually cleaning the rotisserie's cavity and accessories belongs to the past. The TDR auto-clean enables the operator to spend his valuable time on what's most important: serving customers.**

The TDR 8 s auto-clean reduces operational and maintenance costs. It has a surprisingly low water consumption: less than 6.6 gallon per cleaning cycle. It does not have any door seals that need frequent replacement. Our rotisserie cleaning tablets are safe to use for any operator.

With its compact dimensions, the TDR 8 s auto-clean is likely to fit your store. It has an open cavity, providing the benefits of a traditional Fri-Jado rotisserie: preparing crispy and delicious rotisserie chickens that maintain their attractive appearance for hours.



## Features TDR 7/8 s auto-clean

### Top features

- Touch screen controls
- Automatic cleaning system compatible with Fri-Jado Rotisserie Cleaner
- Roasting theatre creates an in-store food experience and stimulates impulse purchases
- 250 programs with up to 9 cook stages per program
- Cook Correction detects and corrects abnormalities during the cook cycle
- Endless possibilities: poultry (parts), pork roast, ribs, lamb, roast beef, pork belly, meat loaf, porchetta and other proteins
- Optional Wi-Fi for monitoring and recipe management via the Rotisserie Dashboard (available 1st of April 2019)

### Standard characteristics

- Supplied on matching stand
- 8 Meat fork or V-spit positions, 7 basket or rack positions
- Rotor for up to 24 chickens (3.5 lbs) per batch
- USB connection for easy transfer of data and programs
- Range of accessories available for preparation of chicken, chicken parts, ribs, etc.

### Accessories

- Meat fork
- Multi-purpose baskets
- V-spits
- Chicken racks



Smart controls









Auto-clean function



Open cavity, no door seals



TDR 7/8 s + TDR 7/8 s auto-clean

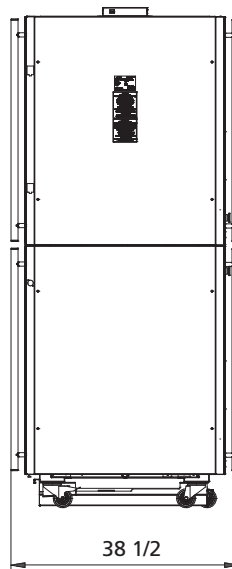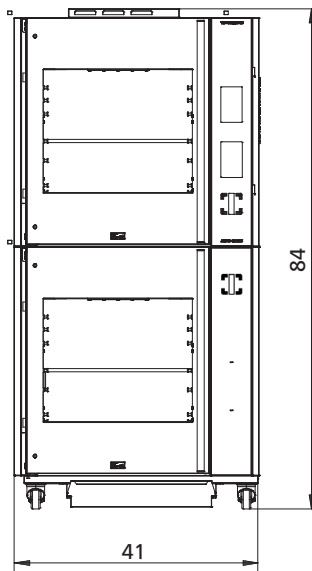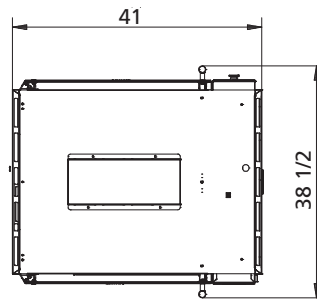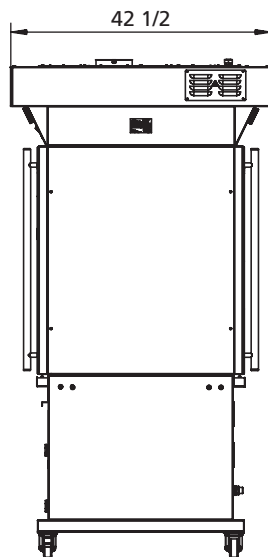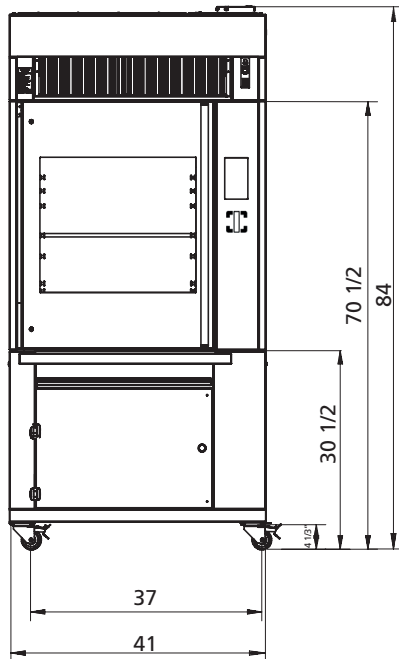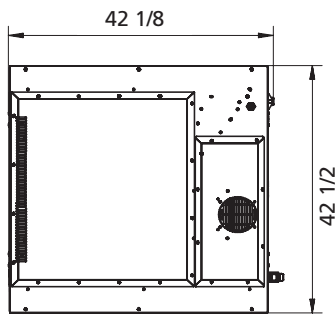

Specifications and technical data are subject to amendment without prior notice.

These are basic drawings. For more detailed technical information, please refer to the installation manual at [www.frijado.com](http://www.frijado.com).

## TDR 7/8 s auto-clean

### Dimensions TDR 7/8 s auto-clean including underframe

Width	41 "
Depth	38 ½ "
Depth with hood	42 ½ "
Height	70 ½ "
Height with hood	84 "

### Technical data TDR 7/8 s auto-clean including underframe

Net weight	552 lbs
Gross weight	662 lbs
Voltage	3~ 208 V
Frequency	50/60 Hz
Power	12 kW
Plug	NEMA 15-50P

### Additional technical data

Water connection (aerated)	¾"
Min. water pressure	29 PSI (200 kPa)
Max. water pressure	72.5 PSI (500 kPa)
Acidity	7.0 - 8.0 pH
Chlorides	<30 ppm
Hardness*	<4 dH
Drain (open connection)	min. 1 5/8"

### Dimensions TDR 7/8 s + TDR 7/8 s auto-clean

Width	41 "
Depth	38 ½ "
Height	84 "

### Technical data TDR 7/8 s + TDR 7/8 s auto-clean

Net weight	948 lbs
Gross weight	1059 lbs
Voltage	3~ 208 V
Frequency	50/60 Hz
Power	12 kW (2x)
Plug	NEMA 15-50P (2x)

### Additional technical data

Water connection (aerated)	¾ inch (2x)
Min. water pressure	29 PSI (200 kPa)
Max. water pressure	72.5 PSI (500 kPa)
Acidity	7.0 - 8.0 pH
Chlorides	<30 ppm
Hardness*	<4 dH
Drain (open connection)	min. 1 5/8 inch (2x)

\* Water hardness and descaling filters.

A descaling filter is advised when the hardness of the water is >4° dH (4 Grains/Gal). A descaling filter is mandatory when the hardness of the water is >20° dH (20 Grains/Gal).

Fri-Jado Inc.

1401 Davey Road

Suite 100

Woodridge IL 60517

Toll free 877-374-5236

Fax 630-689-1424

e-mail [us.info@frijado.com](mailto:us.info@frijado.com)

[usa.frijado.com](http://usa.frijado.com)