



Project _____
AIA # _____ SIS # _____
Item # _____ Quantity _____ C.S.I. Section 114000



ABSHDD-20 - 20-Part Hydraulic Dough Divider



Model ABSHDD-20S / 20R 20-Part Hydraulic Dough Divider

STANDARD FEATURES

- 20S=Square shape; 20R=Round shape
- Strong Welded Steel Frame
- Stainless Steel Bod Panels
- Heavy-Duty Cast Aluminum Bowl and Top
- Spring-Assisted Locking Bowl Cover
- Heavy-Duty Low Noise 66 dB Motor and Pump
- Hand-Operated Valve for Degassing and Cutting
- Sanitary Panel Between Head, Knives, Hydraulics
- Four Locking Casters for Operating Stability

CONTROL AND PERFORMANCE FEATURES

- Totally Enclosed 66 dB Low Noise Hydraulic System
- Heavy-Duty 220 Volt, 3 phase, 60 Hz Motor
- Hand-Operated Valve for Degassing and Cutting
- Automatic Over-Current Protection with Automatic Reset
- Emergency Stop
- Capacity: 35 lbs Dough
- Dough Sections: 3.5 oz to 28 oz.
- 6-foot Electrical Cord with NEMA Cord Cap

OPTIONS & ACCESSORIES

- Single-Phase Electrical Available
- Round Dough Tubs and Tub Rack

STANDARD PRODUCT WARRANTY

- One Year Parts and Labor (Contiguous USA and Canada Mainland)

MARKETING SPECIFICATION

Specified Dough Divider shall be an ABSHDD-20 with solid welded steel frame and stainless steel body panels, heavy duty cast aluminum bowl and spring assisted locking bowl cover, finished in NSF epoxy paint. ABSHDD-20 Teflon-Coated cutting head shall divide 35 pounds maximum dough weight into 20 even dough sections. Unit shall utilize fully-enclosed, low-noise hydraulic system with hand-operated valve to automatically control degassing and cutting. Heavy duty motor and pump with sanitary separation panel between cutting head and pump for easy cleaning. Equipped with Stainless-Steel knives and quick change individual dividing head segments, four locking casters, and ETL/UL and ETL/NSF Listing, meeting both UL 763 and NSF Standard 8.



Meets UL 763 and NSF-8 Standards



MPM Food Equipment Group, LLC
236 Egidi Drive, Suite A, Wheeling, IL 60090
Phone: 800-976-6762 Fax: 847-297-6725
Email: info@mpmfeg.com
WEB: www.mpmfeg.com

Send Orders to: ABSorders@mpmfeg.com



20-Part Hydraulic Dough Divider

ABSHDD-20

HDD-20S CAPACITIES

20-DIVISIONS



16 kg or 35 Lbs Dough

PIECE SIZES

100—800 grams

Or

3.5—28 ounces

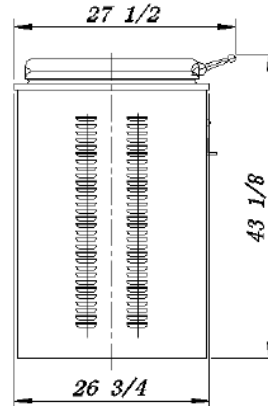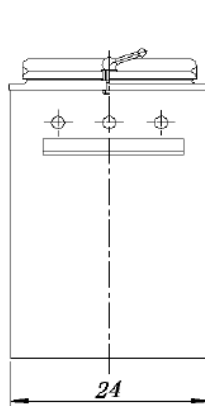

HDD-20R CAPACITIES

20-DIVISIONS

16 kg or 35 Lbs Dough

PIECE SIZES

100—800 grams

Or

3.5—28 ounces

MODEL ABSHDD-20 UTILITY SPECIFICATIONS

Model ABSHDD-20	208-220/60/3
Plug	6-ft Cord; Twist Lock Plug
Slow-Blow Breaker	15 Amp

MODEL ABSHDD-20 CAPACITIES

Model	Divisions	Min Weight	Max Weight	Dough Weight
HD20	20	3.5 oz	28.2 oz	35 lbs

SHIPPING

Model	Crated Dimensions Height x Width x Depth	Unit Dimensions Height x Width x Depth	Weight	Net Weight	Freight Class	Door Clearance	Fork Lift Delivery Recommended
ABSHDD-20	50" x 35" x 29"	42" x 23" x 26"	890	780	85	36"	Yes



Send Orders to: ABSorders@mpmfeg.com